



Translucent

Being used	Fire classification	Thickness	Weight in sq.ft	Growth of microorganisms	Light transmission	Dimensional stability	Width	Tensile strain at break
Residential, pool and spa areas, beauty and health facilities, retail, hospitality, galleries, show rooms, etc	B-s1 D0 B-s2 D0	0,006" ± 10%	8.4 oz ± 5%	No Biocide substance used	30%-80%	-4 °F to + 113 °F	78 ⁴⁷ / ₆₄ 94 ³¹ / ₆₄	MD 250 MC 280

MEMBRANE	OPACITY	LIGHT TRANSMISSION	LIGHT REFLECTION
T-400 Pure White	34 %	67.8 %	31 %
T-402 Cristal	61 %	40.9 %	49.2 %
T-403 White	60 %	42.2 %	56.7 %
T-405 Lumi White	58 %	46.5 %	50.4 %

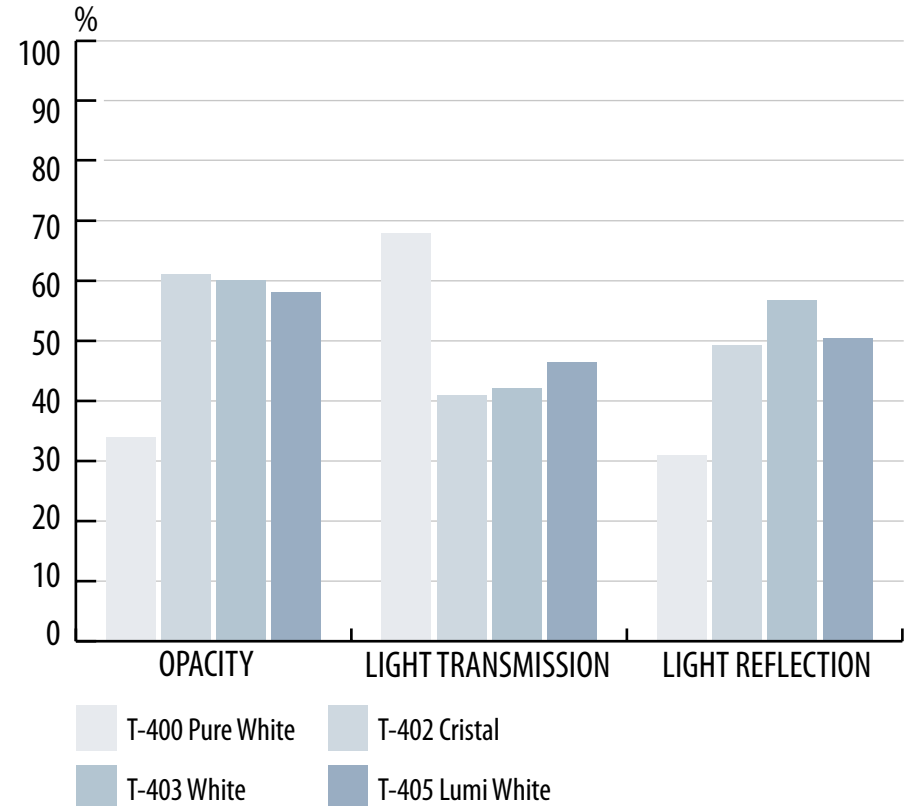

Translucent



42 Broadway 12-241 New York, NY 10004
(212) 658 0004, info@nyceiling.com





AL 05 - profiles
T403 white - stretch ceiling



AL 05 - profiles
T403 white - stretch ceiling



AL 22 expo – profiles
T400 Pure white – stretch ceiling



AL 22 expo – profiles
T400 Pure white – stretch ceiling



AL 03 / AL 04 – profiles
T400 Pure white – stretch ceiling



AL 05 - profiles
T403 white - custom printed
stretch walls